

# BIRDVIEW SKYLIGHTS

The Clear Choice

## REPLACEMENT DOME CHECKLIST AND INFORMATION

### MEASURING:

measure the dome material only, frame dimensions are not needed

- a. Overall dimension a. \_\_\_\_\_
- b. Dome height b. \_\_\_\_\_
- c. Flange width c. \_\_\_\_\_
- d. Quantity d. \_\_\_\_\_

### Circle One:

**Single Dome**

**Double Dome (Set)**

Color: Clear(C) White(W) Bronze (B)

Color: Clear/Clear (C/C) White/Clear (W/C)


Bronze/Clear (B/C) Clear/White (C/W)

### Material Type:

**Acrylic**

**Polycarbonate**

**Gradual Slope Style**

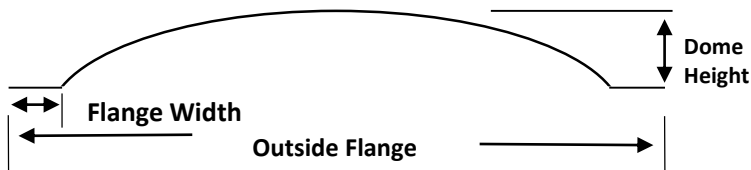

**Sharp Rise**



### INSTALLATION:

Disassemble unit by removing hex head screws around perimeter of the top aluminum retaining angle and remove angle. Separate the domes with a box knife (or any sharp object). Discard broken dome; then clean the perimeter surface of the domes. Set the bottom dome onto skylight frame and apply a small bead of silicone (GE or Dow brand) to the top side of the perimeter surface. Then set the upper dome on top of the lower dome and replace and re-anchor the aluminum retaining angle snugly.

### CLEANING:

Wash domes with a mild soap or detergent and plenty of lukewarm water. Use a soft cloth, applying only light pressure. Rinse with clear water and dry by blotting with a damp cloth or chamois.

**Do NOT USE:** Window cleaning sprays, kitchen scouring compounds, alcohol, or solvents such as acetone, gasoline, benzene, carbon tetrachloride or lacquer thinner. These chemicals can destroy acrylic or polycarbonate dome material.

### Job Details

Quote #

Customer

Job Name

Ship to Zip