GLAZING TYPE

ACRYLIC DOUBLE PYRAMIDS

DOME COLORS (outer/inner)

Approx Light Transmission

27%

CLEAR/ CLEAR 84%
CLEAR/ BRONZE 25%
BRONZE/ BRONZE 7%
CLEAR/ STANDARD WHITE

STANDARD WHITE/ CLEAR

OTHER

FRAME FINISH

MILL FINISH

BRONZE ANODIZED

CLEAR ANODIZED

WHITE PAINTED

OTHER

BAY CONFIGURATION

SKYLIGHT DIMENSION


EXISTING CURB DIM

OR

ID SKYLIGHT FRAME DIM

QTY =

SIZE =

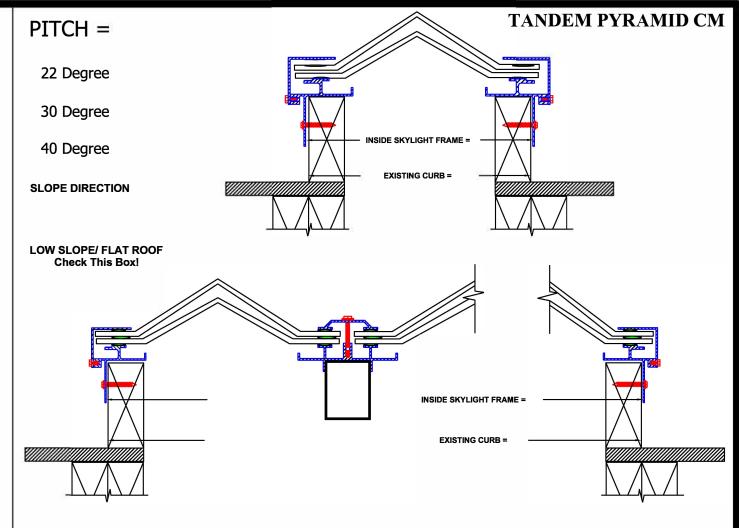

**Complies with OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(1), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Maxim Test loads = minimum 900 ft/lbs up to >3000 ft/lbs

**Test Lab performed static load and drop/impact load test on the test specimen using a 100lb & 200lb bag filled with sand & stone. Testing was performed to verify the skylight system meets the static load requirements without the use of an exterior protective screen or cover. Upon completion of the static load test the bag was raised to incremental heights from 2' 0" to up to 16' 0" and dropped onto the skylight glazing with no permanent damage to the skylight frame or glazing to confirm compliance

APPROVAL SIGNATURE & DATE



201 Longhorn Rd, Fort Worth TX 76179 P: 817-439-9266 F: 817-232-8468