## **GLAZING TYPE**

ACYRLIC DOUBLE DOME(S)

## DOME COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	84%
CLEAR/ BRONZE	25%
BRONZE/ BRONZE	7%
BRONZE/ CLEAR	25%
CLEAR/ WHITE	27%
WHITE/ CLEAR	27%
OTHER	

## FRAME FINISH

MILL FINISH BRONZE PAINTED WHITE PAINTED


OTHER

## **SKYLIGHT DIMENSION**

EXISTING CURB DIM OR

ID SKYLIGHT FRAME DIM

QTY =

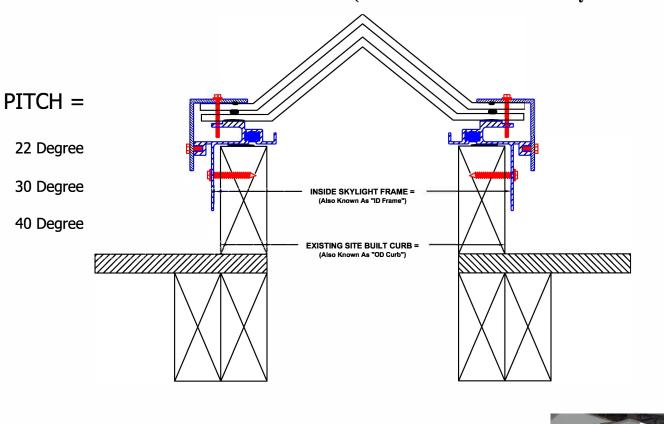

\*\*Tested and conforming to AAMA/WDMN/CSA 101/I.S.2/A440-08
\*\*North American Fenestration Standard/Specification for Skylights
\*\*Air Penetration = <0.01 cfm/ft2
\*\*Water Penetration = 9.19psf
\*\*U-Factor = 0.73 (NFRC 100 200) ; SHGC = 0.28 (NFRC 200 2010)
\*\* Design Pressure = ± 60.15psf</pre>

**APPROVAL SIGNATURE & DATE** 

**TESTING & CERTIFICATIONS** 



**TBCM (Thermal Break Frame & Pyramid Domes)** 

SIZE =