

GLAZING TYPE

100% IMPACT MODIFIED ACRLYIC ■
 3/16" OUTER & 3/16" INNER DOUBLE DOMES

Double layer of 3/16" 100% Impact Modified Acrylic offers extreme impact resistance and allows for sizes up to 96" X 96"

DOME COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	81%
BRONZE/ CLEAR	25%
CLEAR/ WHITE	47%
WHITE/ CLEAR	47%
OTHER	

FRAME FINISH

- MILL FINISH
- BRONZE ANODIZED
- CLEAR ANODIZED
- WHITE POWDER COAT
- CUSTOM POWDER COAT (RAL #)

SKYLIGHT DIMENSION

EXISTING CURB DIM OR
 ID SKYLIGHT FRAME DIM

QTY =

SIZE =


PITCH =

22 Degree

30 Degree

40 Degree

TBCM (Thermal Break Frame & Pyramid Domes)

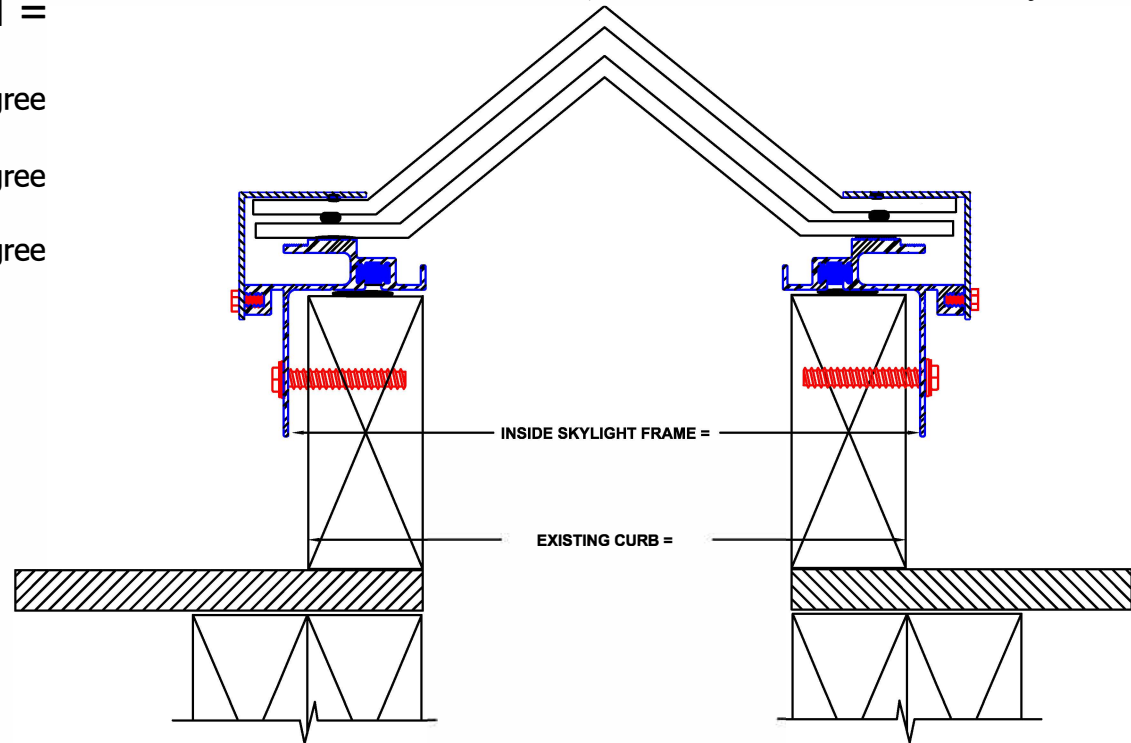

****Complies with 2017 OSHA Fall Protection guidelines with no additional coverage/screen required**

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(1), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Test loads = minimum 900 ft/lbs up to >3000 ft/lbs

**Test Lab performed static load and drop/impact load test on the test specimen using a 100lb & 200lb bag filled with sand & stone. Testing was performed to verify the skylight system meets the static load requirements without the use of an exterior protective screen or cover. Upon completion of the static load test the bag was raised to incremental heights from 2' 0" to up to 16' 0" and dropped onto the skylight glazing with no permanent damage to the skylight frame or glazing to confirm compliance

**Maximum Certified Size = 65 square feet in any configuration

APPROVAL SIGNATURE & DATE

Birdview
SKYLIGHTS

201 Longhorn Rd, Fort Worth TX 76179
 P: 817-439-9266 F: 817-232-8468