

GLAZING TYPE

ACRYLIC DOUBLE DOME(S)
 POLYCARBONATE DOUBLE DOME(S)

DOME COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	84%
BRONZE/ CLEAR	25%
BRONZE/ BRONZE	7%
CLEAR/ STANDARD WHITE	27%
STANDARD WHITE/ CLEAR	27%
OTHER	

FRAME FINISH

- MILL FINISH
- BRONZE PAINTED
- WHITE PAINTED
- CLEAR ANODIZED
- OTHER

SKYLIGHT DIMENSION


EXISTING CURB DIM OR
 ID SKYLIGHT FRAME DIM

QTY =

SIZE =

MODEL TBCM - Thermal Break Curb Mount

DP: ± 60psf

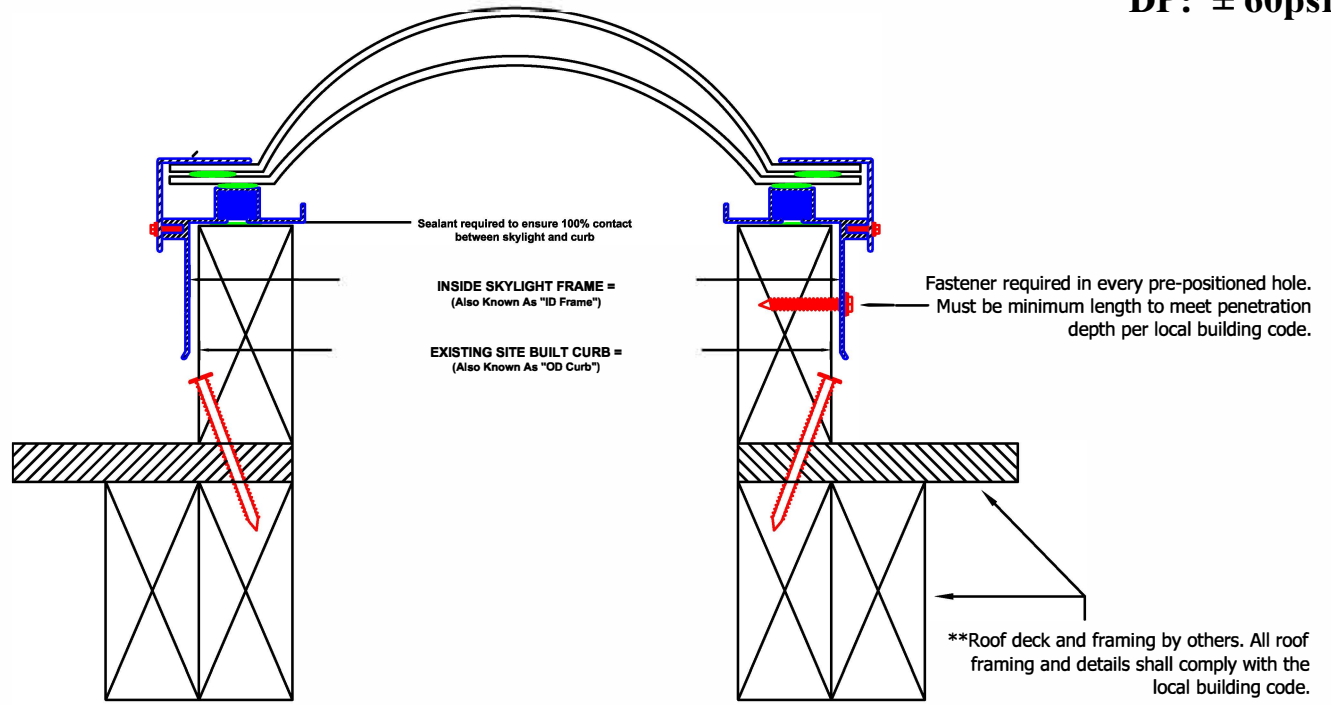

TESTING & CERTIFICATIONS

- **Tested and conforming to AAMA/WDMN/CSA 101/I.S.2/A440-08
- **North American Fenestration Standard/Specification for Skylights
- **Air Penetration = <0.01 cfm/ft²
- **Water Penetration = 9.19psf
- **U-Factor = 0.73 (NFRC 100 200) ; SHGC = 0.28 (NFRC 200 2010)
- **Design Pressure = ± 60.15psf

APPROVAL SIGNATURE & DATE

Birdview
SKYLIGHTS

201 Longhorn Rd, Fort Worth TX 76179
 P: 817-439-9266 F: 817-232-8468