GLAZING TYPE

ACRYLIC DOUBLE DOME(S)

DOME COLORS (outer/inner)

	Approx Ligh Transmissio
CLEAR/ CLEAR	84%
BRONZE/CLEAR	25%
BRONZE/ BRONZE	7%
CLEAR/ STANDARD WHITE	27%
STANDARD WHITE/ CLEAR	27%
BRONZE/ CLEAR	7%
OTHER	

FRAME FINISH

MILL FINISH

BRONZE PAINTED

WHITE PAINTED

OTHER

SKYLIGHT DIMENSION

EXISTING CURB DIM


OR

ID SKYLIGHT FRAME DIM

QTY =

SIZE =

Curb Mount - Pyramid

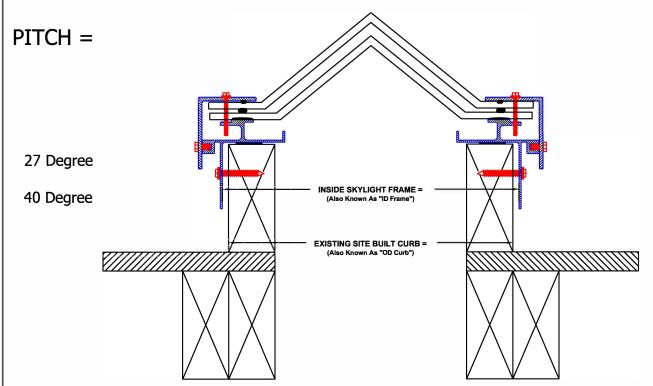

TESTING & CERTIFICATIONS

- **Tested and conforming to AAMA/WDMN/CSA 101/I.S.2/A440-08
- **North American Fenestration Standard/Specification for Skylights
- **Air Penetration = <0.01 cfm/ft2
- **Water Penetration = 9.19psf
- **U-Factor = 0.73 (NFRC 100 200); SHGC = 0.28 (NFRC 200 2010)
- ** Design Pressure = \pm 60.15psf

APPROVAL SIGNATURE & DATE



201 Longhorn Rd, Fort Worth TX 76179 P: 817-439-9266 F: 817-232-8468