

GLAZING TYPE

POLYCARBONATE DOUBLE DOME(S) ■

DOME COLORS (outer/ inner)

Approx Light Transmission

CLEAR/ CLEAR	84%
CLEAR/ BRONZE	25%
BRONZE/ BRONZE	7%
BRONZE/ CLEAR	25%
CLEAR/ WHITE	27%
WHITE/ CLEAR	27%
OTHER	

FRAME FINISH

- MILL FINISH
- BRONZE PAINTED
- WHITE PAINTED
- OTHER

SKYLIGHT DIMENSION

EXISTING CURB DIM OR

ID SKYLIGHT FRAME DIM

QTY =

SIZE =



TBCM (Thermal Break Frame & Pyramid Domes)

PITCH =

22 Degree

30 Degree

40 Degree

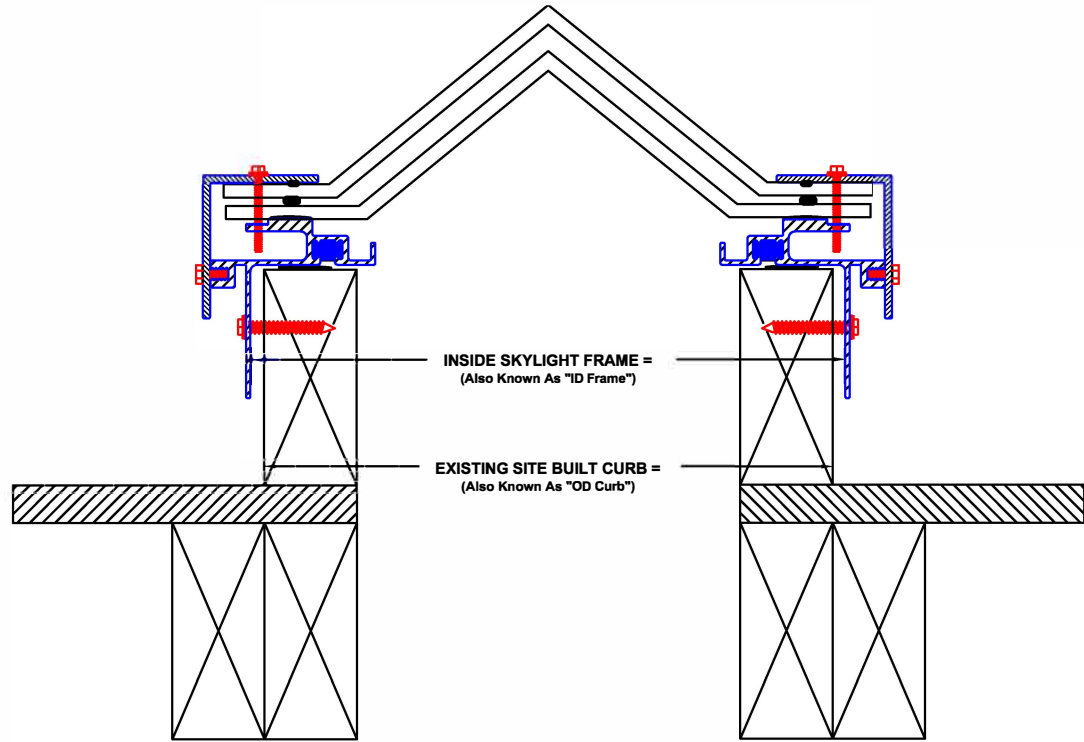

Miami-Dade NOA 21-0414.06 • FBC #FL2418 • NAMI Certified

**Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-08

**Tested and conforming to ASTM E1886-05 & ASTM 1996-05

**Meets 2017 OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(1), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Test loads = minimum 900 ft/lbs up to >3000 ft/lbs

**Units can be submitted under Miami-Dade NOA or FBC Approval

APPROVAL SIGNATURE & DATE

Birdview
SKYLIGHTS

201 Longhorn Rd, Fort Worth TX 76179
P: 817-439-9266 F: 817-232-8468