

GLAZING TYPE

POLYCARBONATE DOUBLE DOME(S) ■

DOME COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	84%
BRONZE/ CLEAR	25%
BRONZE/ BRONZE	7%
CLEAR/ HIGH LIGHT WHITE	68%
HIGH LIGHT WHITE/ CLEAR	68%
CLEAR/ STANDARD WHITE	27%
STANDARD WHITE/ CLEAR	27%
OTHER	

FRAME FINISH

- MILL FINISH
- BRONZE PAINTED
- CLEAR ANODIZED
- OTHER

SKYLIGHT DIMENSION

EXISTING CURB DIM OR

ID SKYLIGHT FRAME DIM

QTY =

SIZE =

**Where Miami-Dade NOA is required, please verify that pyramid domes will be acceptable for use by local building department.


MODEL CM (Pyramid Domes)

PITCH =

22 Degree

30 Degree

40 Degree

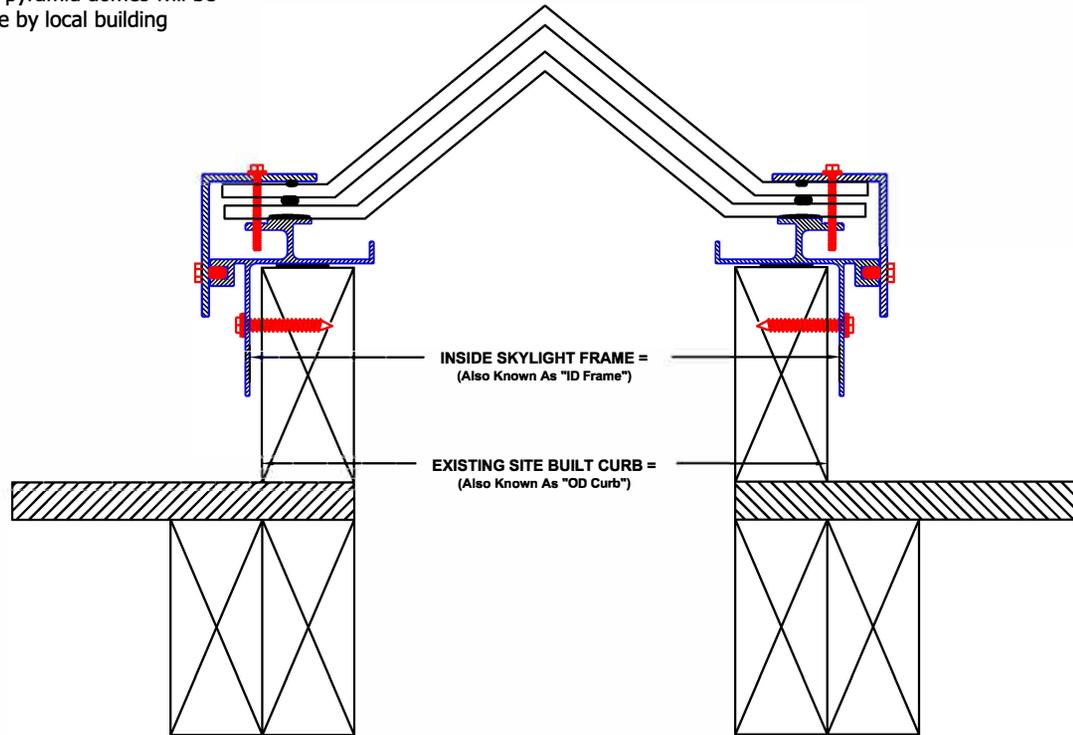

Miami-Dade NOA 22-1222.01 • 8th Edition 2023 FBC • NAMI Certified

**Tested and conforming to AAMA/WDMNCSA 101/I.S.2/A440-17

**Tested and conforming to ASTM E1886-13A & ASTM 1996-17 Missile Level D, Wind Zone 4

**Meets OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(1), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement.

- **Meets Forced Entry Protection ASTM F588 & UL 972

APPROVAL SIGNATURE & DATE

Birdview
SKYLIGHTS

201 Longhorn Rd, Fort Worth TX 76179
P: 817-439-9266 F: 817-232-8468