

GLAZING TYPE

ACRYLIC DOUBLE DOME(S)
POLYCARBONATE DOUBLE DOME(S)

DOME COLORS (outer/ inner)

	Approx Light Transmission
CLEAR/ CLEAR	84%
BRONZE/ CLEAR	25%
BRONZE/ BRONZE	7%
CLEAR/ STANDARD WHITE	27%
STANDARD WHITE/ CLEAR	27%
OTHER	

FRAME FINISH

MILL FINISH
BRONZE PAINTED
WHITE PAINTED
CLEAR ANODIZED
OTHER


SKYLIGHT DIMENSION

EXISTING CURB DIM OR
ID SKYLIGHT FRAME DIM

QTY =

SIZE =

MODEL TBCM - Thermal Break Curb Mount

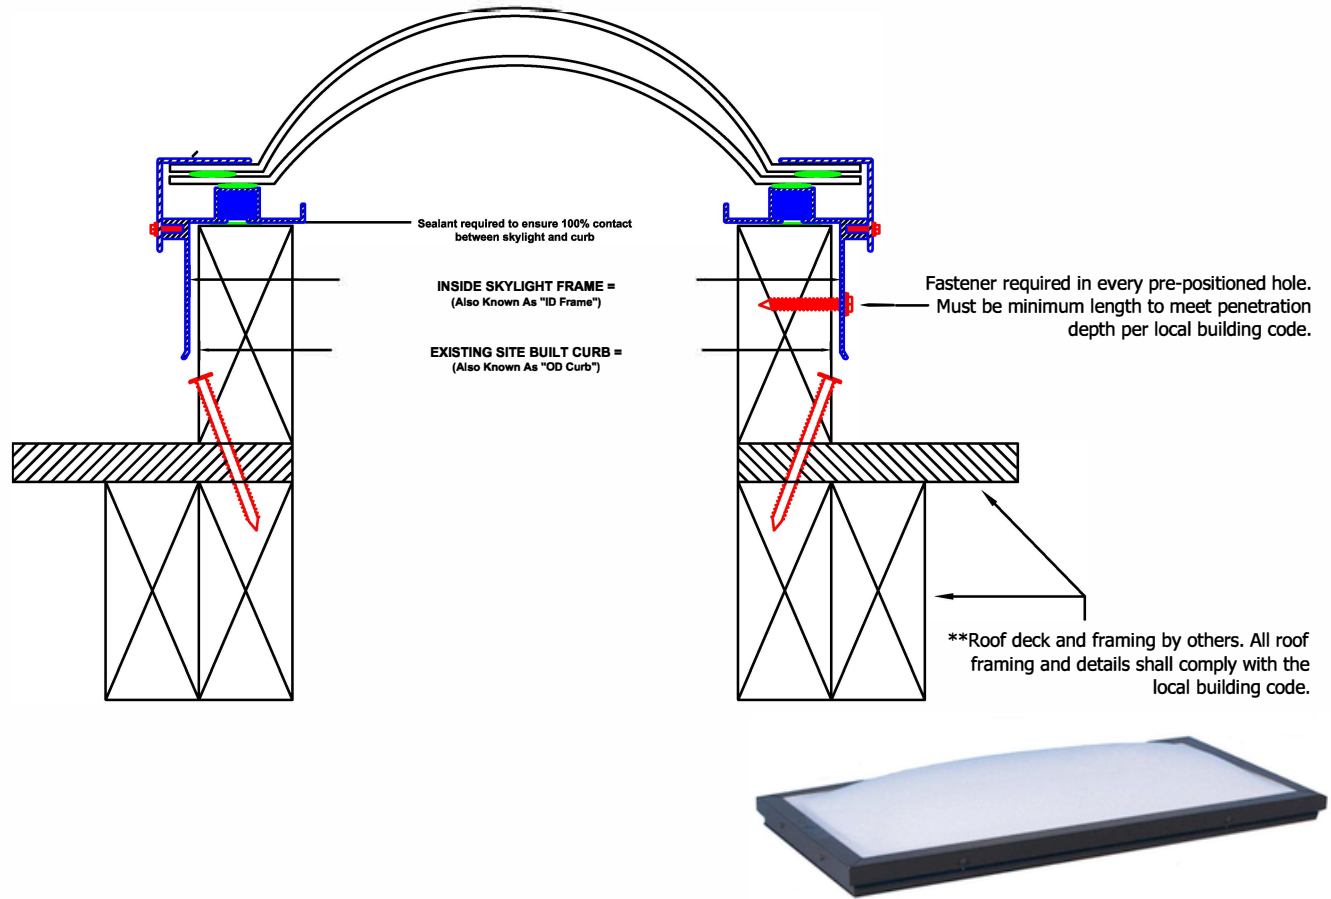

Miami-Dade NOA 24-0109.03 • 8th Edition 2023 FBC • NAMI Certified

**Tested and conforming to AAMA/WDMA/CSA 101/I.S.2/A440-08

**Tested and conforming to ASTM E1886-05 & ASTM 1996-05 Missile Level D, Wind Zone 4

**Meets 2017 OSHA Fall Protection guidelines with no additional coverage/screen required

OSHA 1910.28(b)(3)(i), 1910.28(b)(3)(i)(A), 1910.29(e)(l), 1910.29(e)(2); glazed opening is capable of supporting, without failure, at least twice the maximum intended load that may be imposed on the cover at any one time and glazing is secured to prevent accidental displacement. Maxim Test loads= minimum 900 ft/lbs up to >3000 ft/lbs

**Units can be submitted under Miami-Dade NOA or FBC Approval

APPROVAL SIGNATURE & DATE

Birdview
SKYLIGHTS

201 Longhorn Rd, Fort Worth TX 76179
P: 817-439-9266 F: 817-232-8468